



OX Engineered Products
p. 1.800.345.8881
f. 248.289.9955
oxep.com

seamTAPE[®]

COMMERCIAL sheathing tape
by OX



Ox Commercial SeamTape[®] is a foil faced seam tape, designed for use as a closure system and vapor seal on exterior sheathing products like Ox Strong-R[®] and ISO Red MAX[®] products. Ox Commercial SeamTape[®] exceeds most building code requirements and can be used for new construction as well as repair on all vapor barrier materials. Available in 2⁷/₈" x 150'

Usage

For use with Strong-R,[®]
and ISO RED MAX[®]
products.

Application

Installs and performs
well over wide
temperature ranges.
Ox Commercial Seam Tape[®]
must be used with Strong-R[®]
or ISO RED MAX[®] in order to
meet the 30-year limited
system warranty requirements

Available


Foil Faced
2⁷/₈" x 150'

Attributes


- For use with Strong-R®, ISO RED MAX®, and other Ox building products.
- High performance sheathing tape installs and performs well over a wide temperature range.
- Excellent vapor barrier tape.
- Performs well as a seam tape for all major housewraps and extruded foam products.
- AST E84 (0 smoke, 5 flame)

Installation

Panel Taping

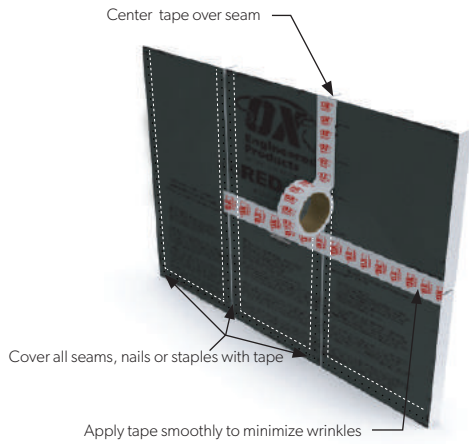

Shingle fashion technique

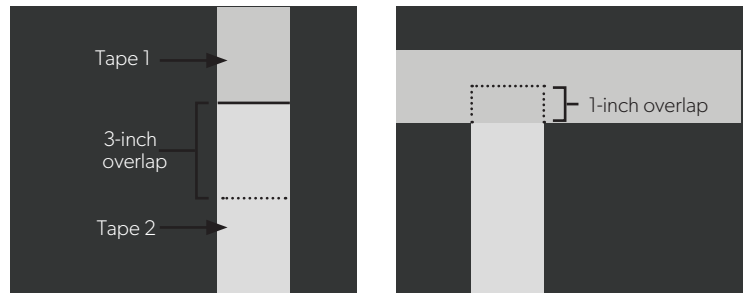

Technical Data for Ox Commercial Seam Tape®

Properties	Typical Value	Typical Value (Metric)	Test Method
Product thickness	3.35 mils	0.65 mm	PSTC-133
Peel Adhesion	≥70 oz/in	16.7 N/25 mm	PSTC-101
Tensile Strength	10.2 lb/in.	90.4 N/25 mm	PSTC-131
Application Temperature	-4° to 104° F	-20° to 48° C	